

# Front Grille Package Installation

## [Installation Instructions Part Number](#)

84629507

### Kit Contents

Qty	Description
1	Upper Grille
1	Installation Instructions

## [Procedure](#)

### Preliminary Procedures


1. Remove the front bumper fascia. Refer to [Front Bumper Fascia Removal and Installation](#) in Vehicle Service Manual.

**Note:** If the vehicle has trim level RPO (G29) or (FC3) re-use vehicle's existing camera.


**Note:** If the vehicle has trim level RPO (G0T) or (G0V) use new camera provided with accessory grille kit.

2. Remove the front view driver information camera. Refer to [Front View Driver Information Camera Replacement](#) in Vehicle Service Manual.

### Remove Grille

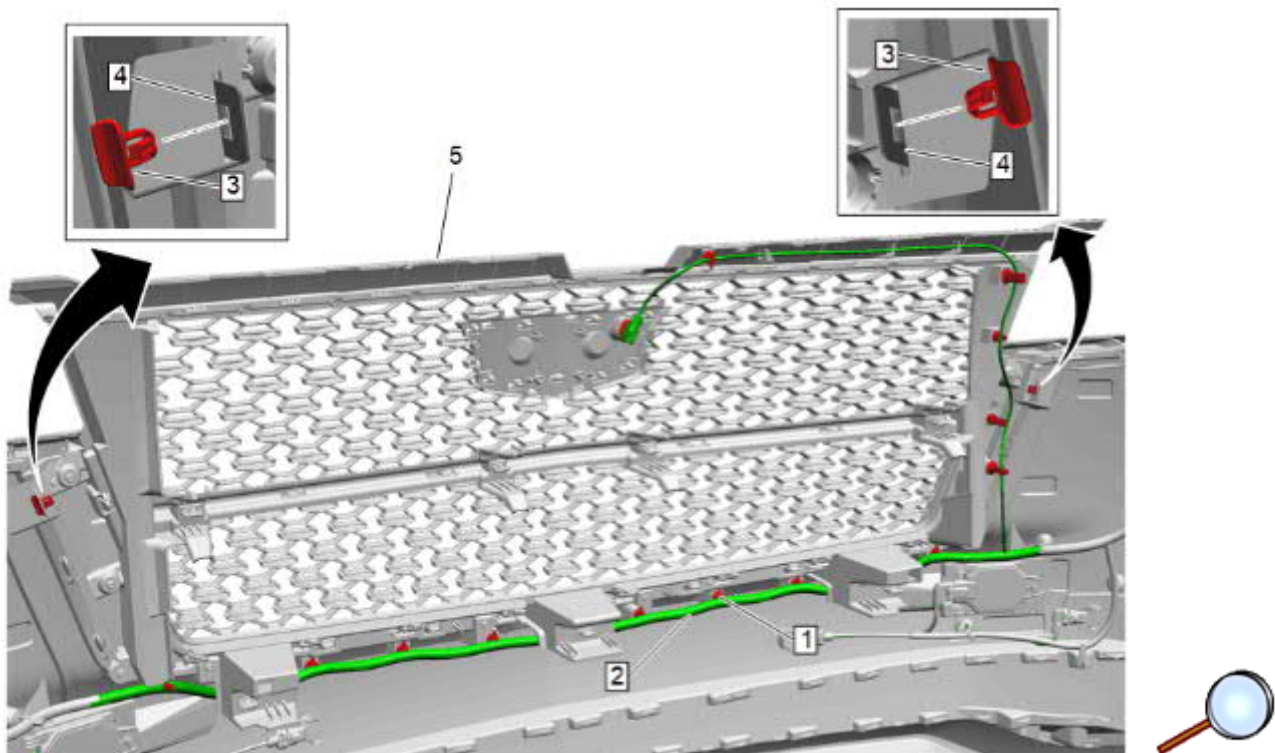


1. Disengage the harness retainers (1) from grille (5) and reposition harness (2).
2. Remove left and right grille retainers (3) from the front fascia tabs (4), keep retainers.

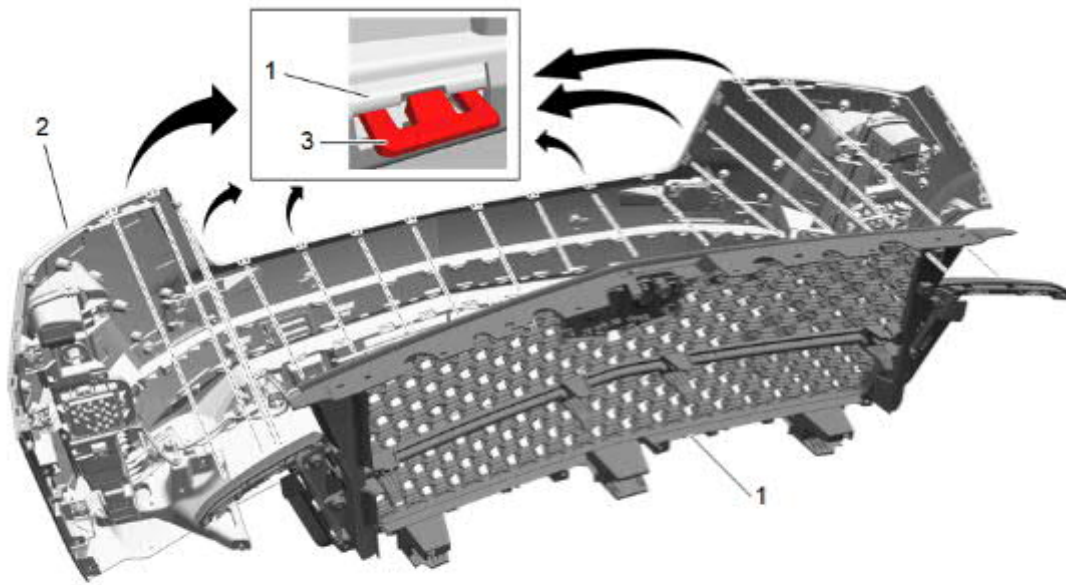


3. Using a suitable plastic flat bladed plastic tool, disengage the fascia tabs (3) from the front upper grille (1).
4. Remove the front upper grille (1) from the front bumper fascia (2).

### **Install Accessory Grille**

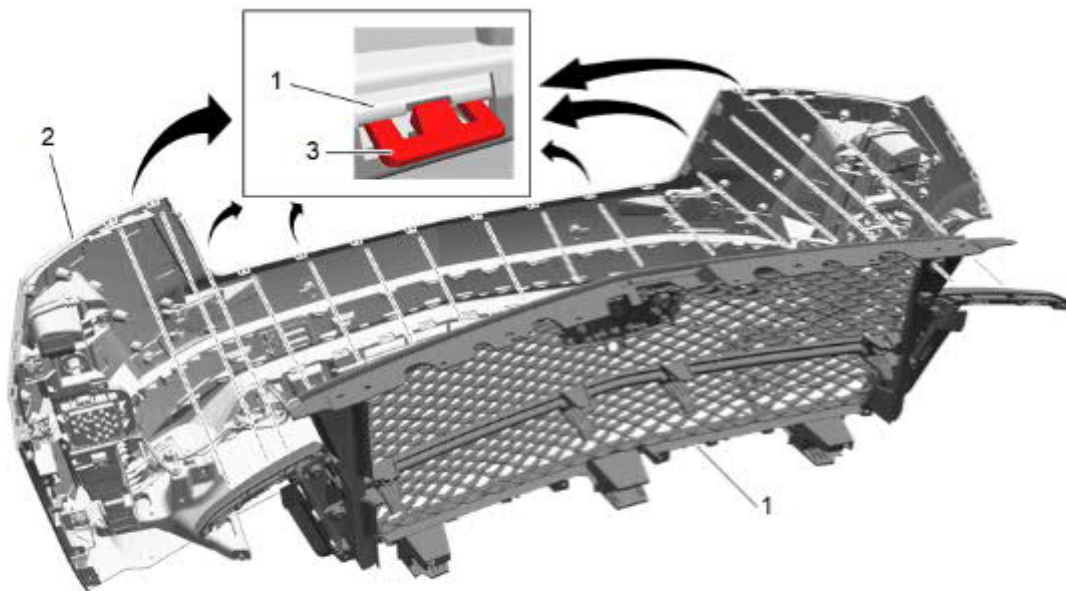

1. Position the front accessory grille upper grille (1) to the front bumper fascia (2) and carefully engage the front bumper fascia tabs (3).

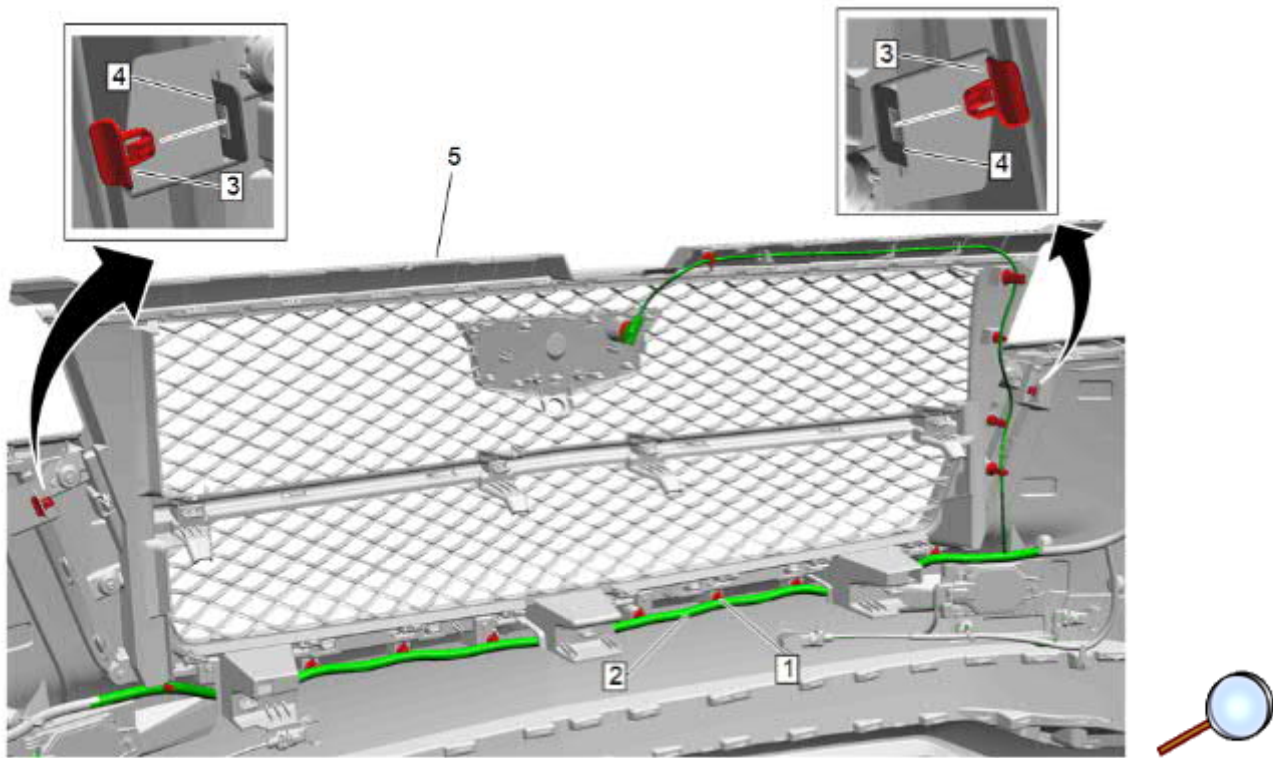

2. Reinstall left and right grille retainers (3) to the front fascia tabs (4).
3. Reposition harness (2) and engage the harness retainers (1) to grille (5).

**Note:** If the vehicle has trim level RPO **(G29)** or **(FC3)** re-use vehicle's existing camera.

**Note:** If the vehicle has trim level RPO **(G0T)** or **(GOV)** use new camera provided with accessory grille kit.

4. Install the front view driver information camera. Refer to [Front View Driver Information Camera Replacement](#) in Vehicle Service Manual.
5. Reinstall the front bumper fascia. Refer to [Front Bumper Fascia Removal and Installation](#) in Vehicle Service Manual.

**Note:** Steps 6 and 7 are only required for trim levels **(GOV)** and **(G0T)** which use the camera included in the accessory kit.

6. Perform the video processing control module programming and setup. Refer to [K157 Video Processing Module: Programming and Setup](#).

**Note:** This kit includes a calibration update for the Video Processing Module. Reprogramming is done with a Service Programming System at an Authorized GM Dealer. When reprogramming, the GM dealer needs to call the Techline Customer Support Center (TCSC). Call TCSC (1-888-337-1010) to obtain the updated accessory calibration. You must have the vehicle's VIN that will be upgraded.

7. Perform the video processing control module calibration for the front camera. Refer to [Video Processing Control Module Calibration](#).