

Front Grille Package Installation (Instruction ID : 42849582)

[Installation Instructions Part Number](#)

42849582


Kit Contents

Qty	Description
1	Grille Assembly
1	Installation Instructions


[Procedure](#)

Remove OEM Grille


1. Remove the Front Bumper Fascia. Refer to [Front Bumper Fascia Replacement](#) in Vehicle Service Manual.
2. Place the front bumper fascia face down on a clean protected surface.

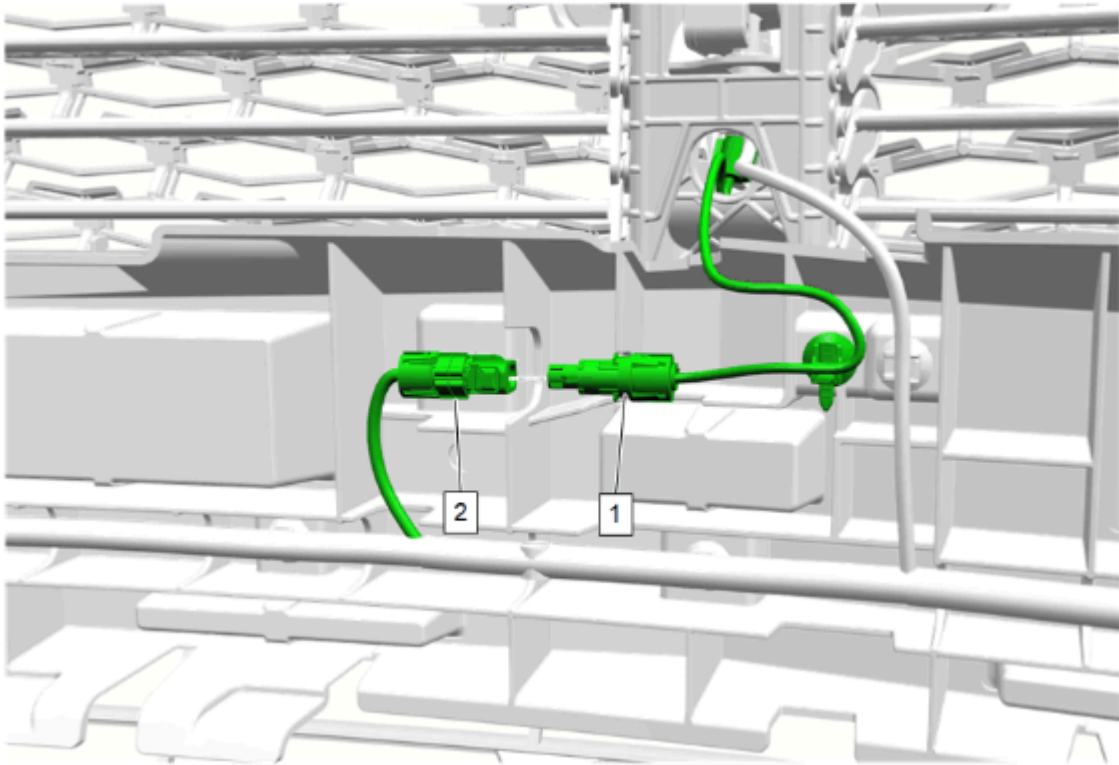


3. Disconnect the front camera harness connector (1) from the front fascia harness connector (2), if equipped.

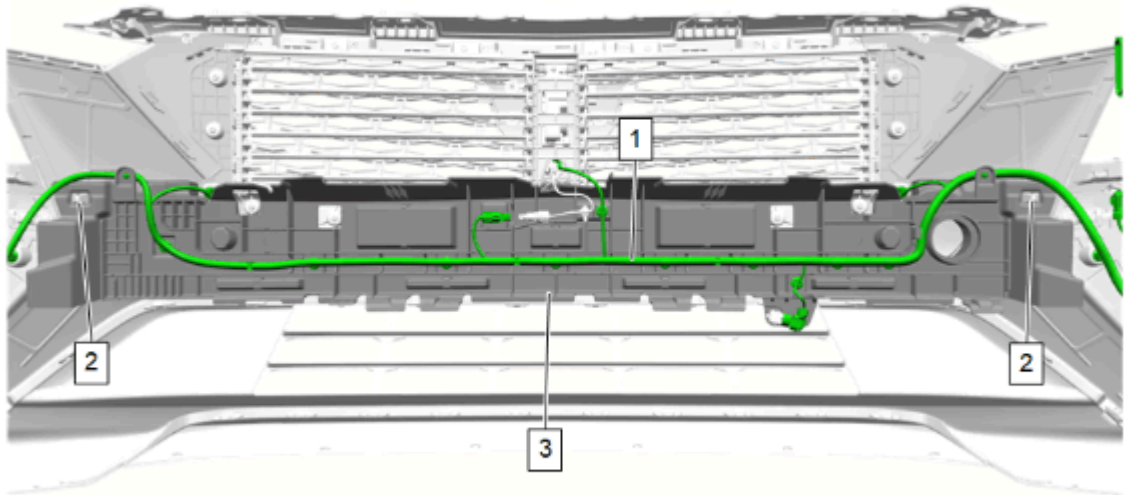


4. Reposition the fascia wiring harness (1).
5. Disengage the retainers (2) and reposition the front fascia energy absorber (3).

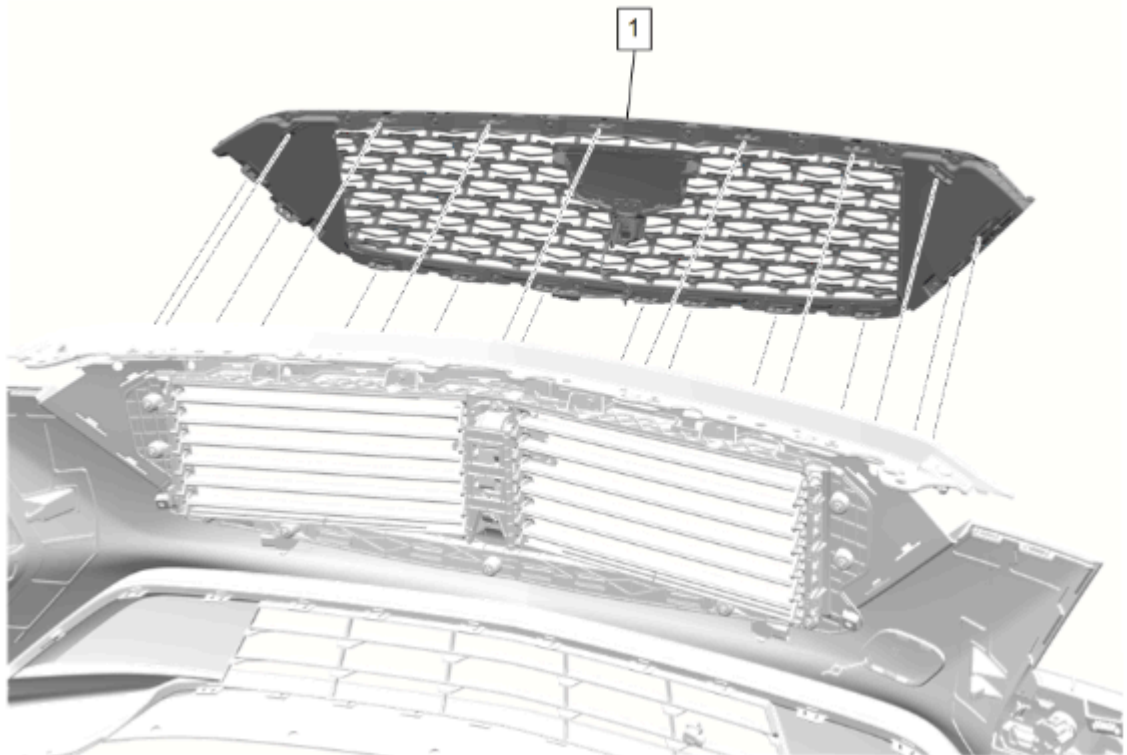

6. Remove the front grille (1).
7. Using a suitable trim tool, release the locking tabs while carefully pulling the front grille (1) from the front fascia.

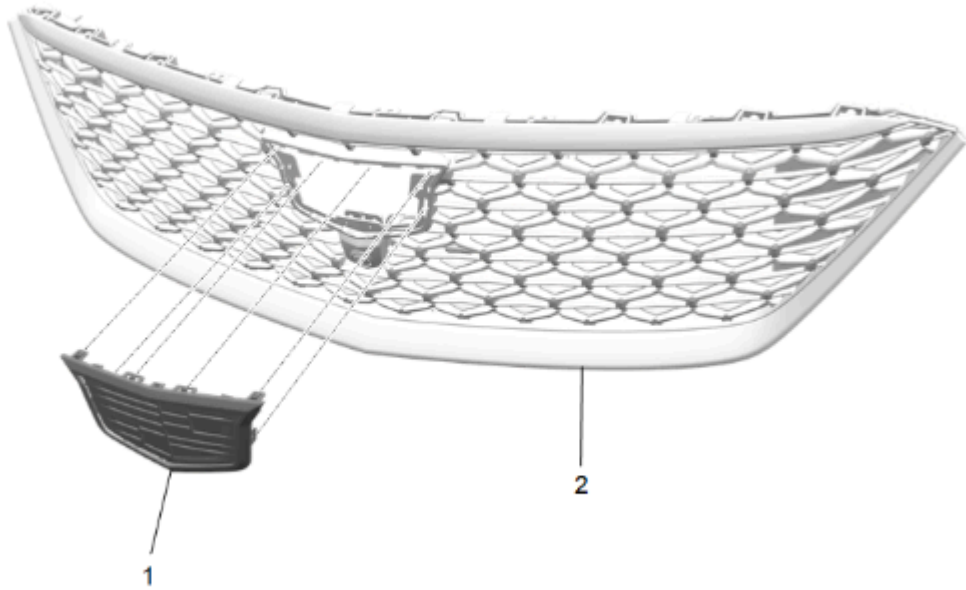


8. Release the retaining tabs from the grille emblem (1) and remove from grille (2).

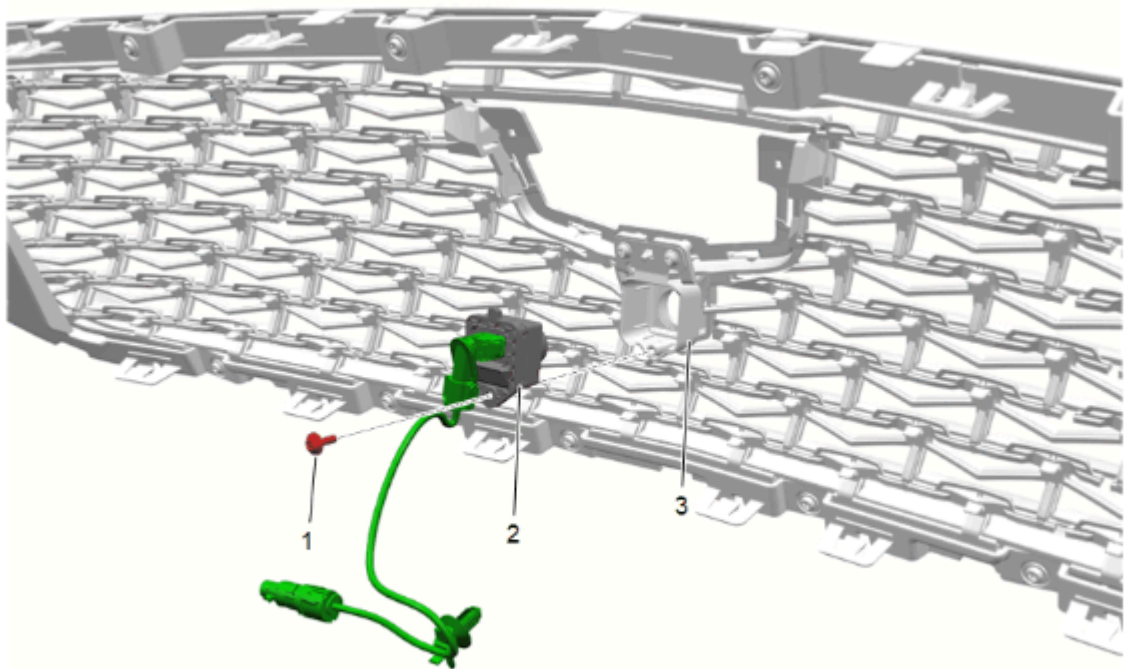

9. **{ If equipped } Front View Driver Information Camera:** Remove and retain the bolt (1) securing the front camera (2) to the front grille camera bracket (3).


10. Remove the front camera (2) from the front grille camera bracket (3).

Install New Grille

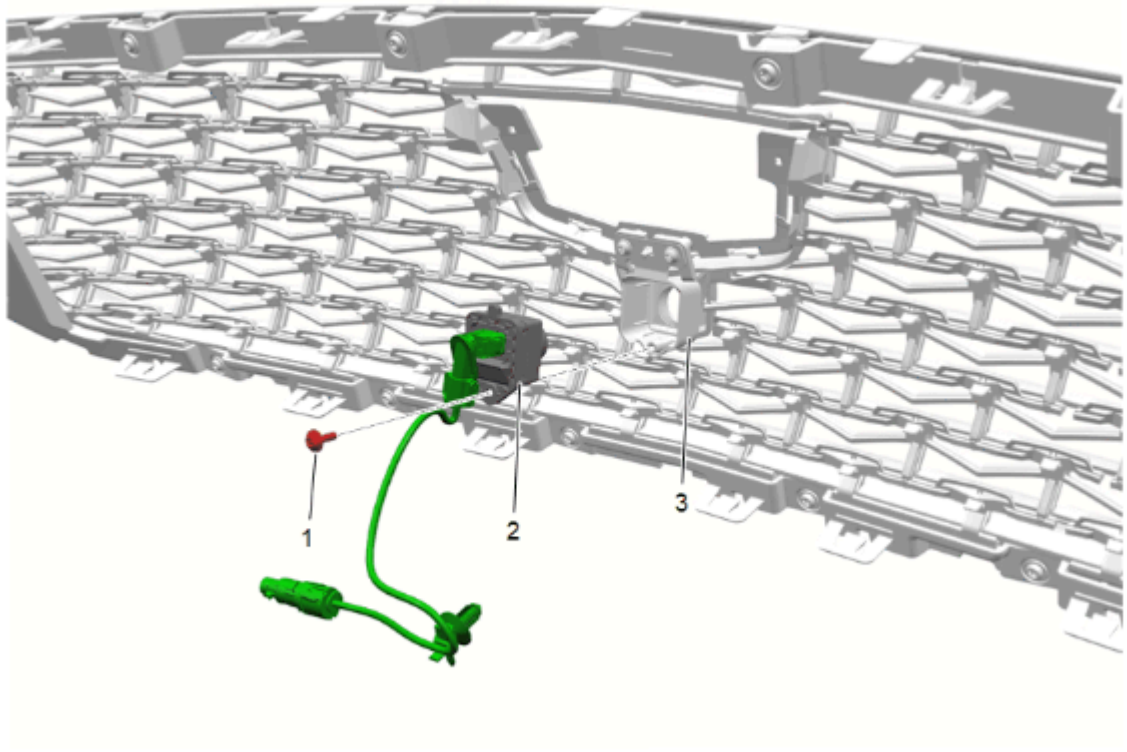


Caution: Use the correct fastener in the correct location. Replacement fasteners must be the correct part number for that application. Fasteners requiring replacement or fasteners requiring the use of thread locking compound or sealant are identified in the service procedure. Do not use paints, lubricants, or corrosion inhibitors on fasteners or fastener joint surfaces unless specified. These coatings affect fastener torque and joint clamping force and may damage the fastener. Use the correct tightening sequence and specifications when installing fasteners in order to avoid damage to parts and systems.

1. Reinstall the front camera (2) to the new front grille camera bracket (3), if equipped.
2. Install the bolt (1) securing the front camera (2) to the front grille camera bracket (3). Tighten the bolt to **2.5 N•m (22 lb in)** .

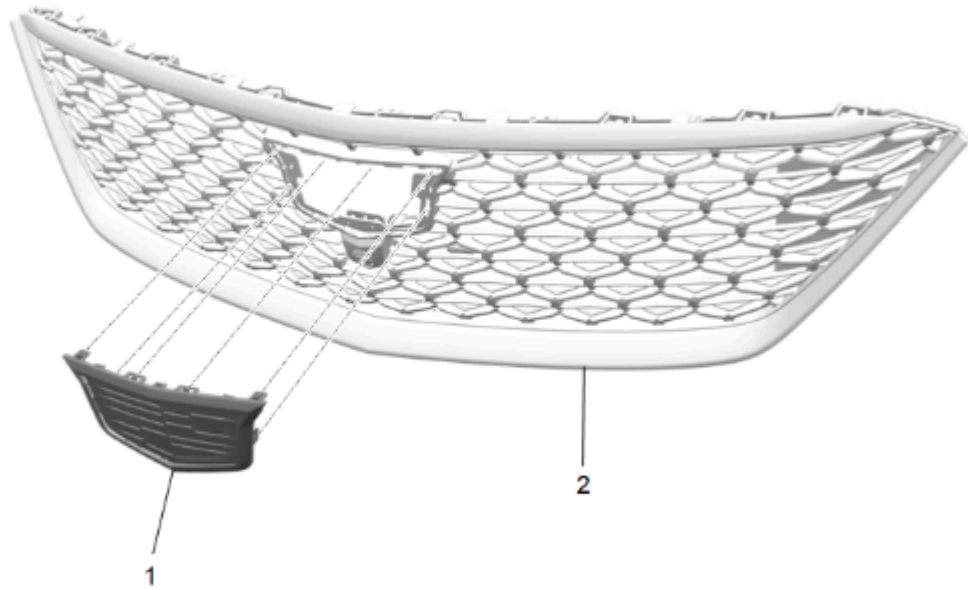


3. Position the grille emblem (1) to the new grille (2) making sure the locking tabs are engaged.

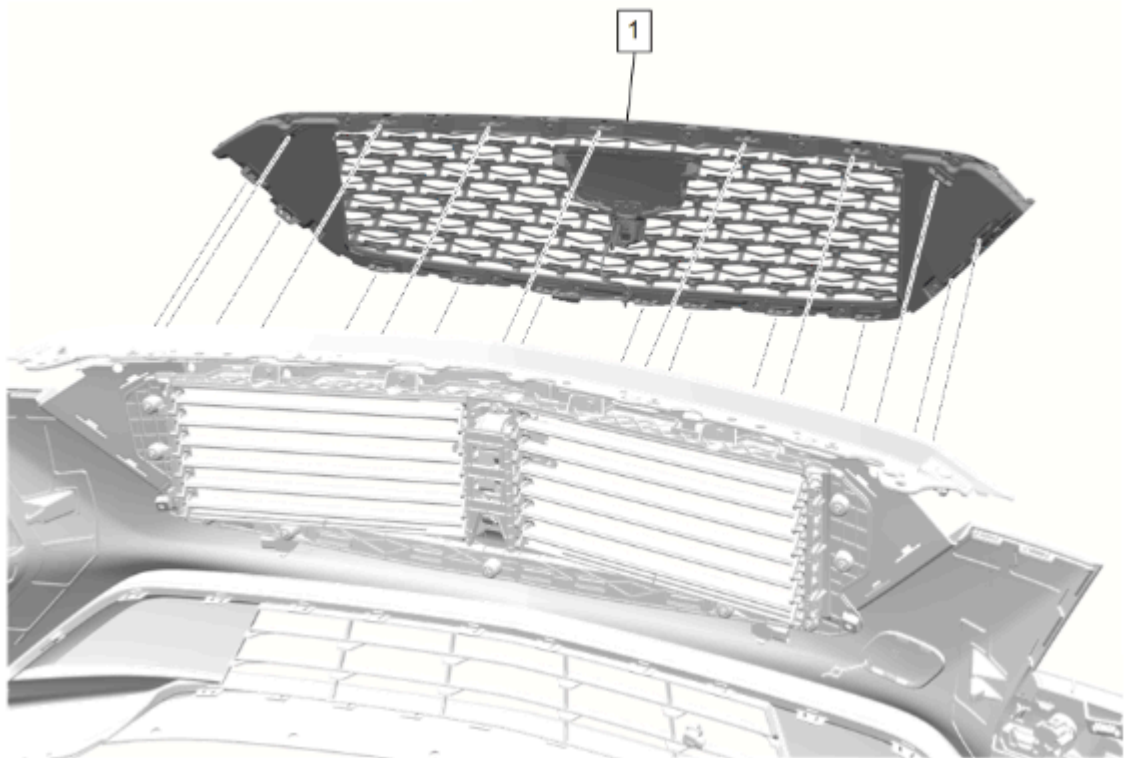


4. Install the new front grille (1) to the fascia engaging the locking tabs.

Note: Each individual front bumper fascia tab must be secure to each slit in the front grille prior to reassembly of the front fascia to the vehicle.

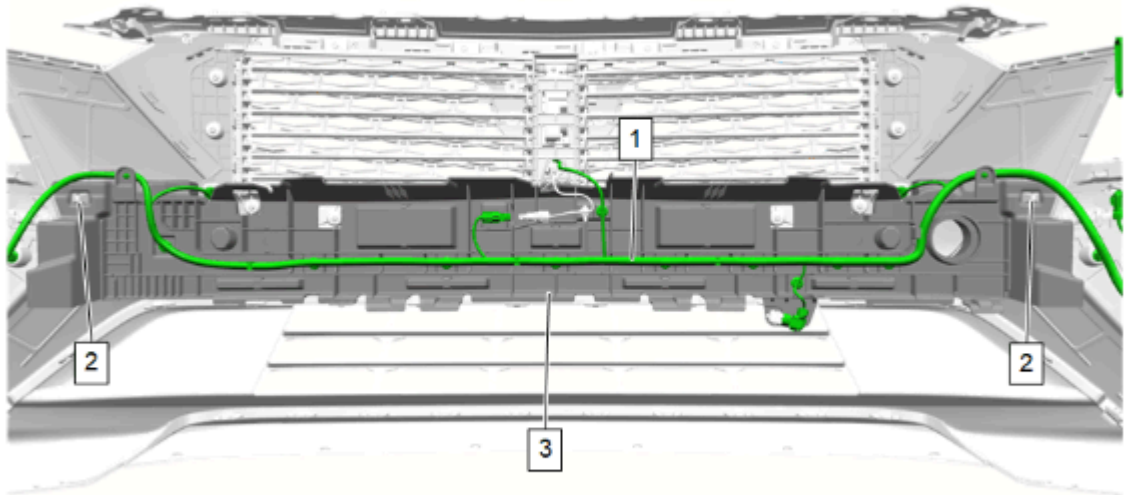

5. Install the front fascia energy absorber (3) and engage the absorber retainers (2).
6. Install the fascia wiring harness (1).

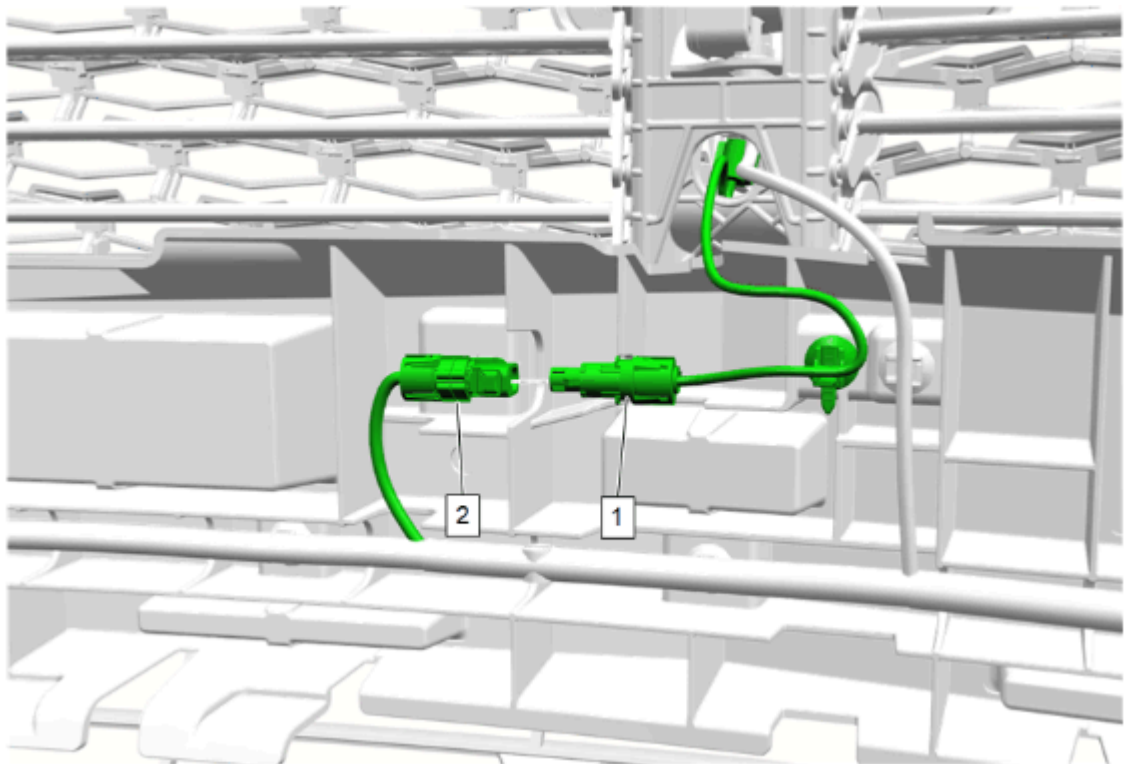

7. Reconnect front camera harness connector (1) to the front fascia harness connector (2), if equipped.
8. Reinstall the Front Bumper Fascia. Refer to [Front Bumper Fascia Replacement](#) in Vehicle Service Manual.

