

Rear Decal Package Installation

Installation Instructions Part Number

84425989


Kit Contents

Qty	Description
1	Decal-Endgate Letters Sheet
1	Felt Block (Application Tool)
1	Installation Instructions

Tools Required

- Lint-free cloth
- Hair Dryer

[Installation Procedure](#)

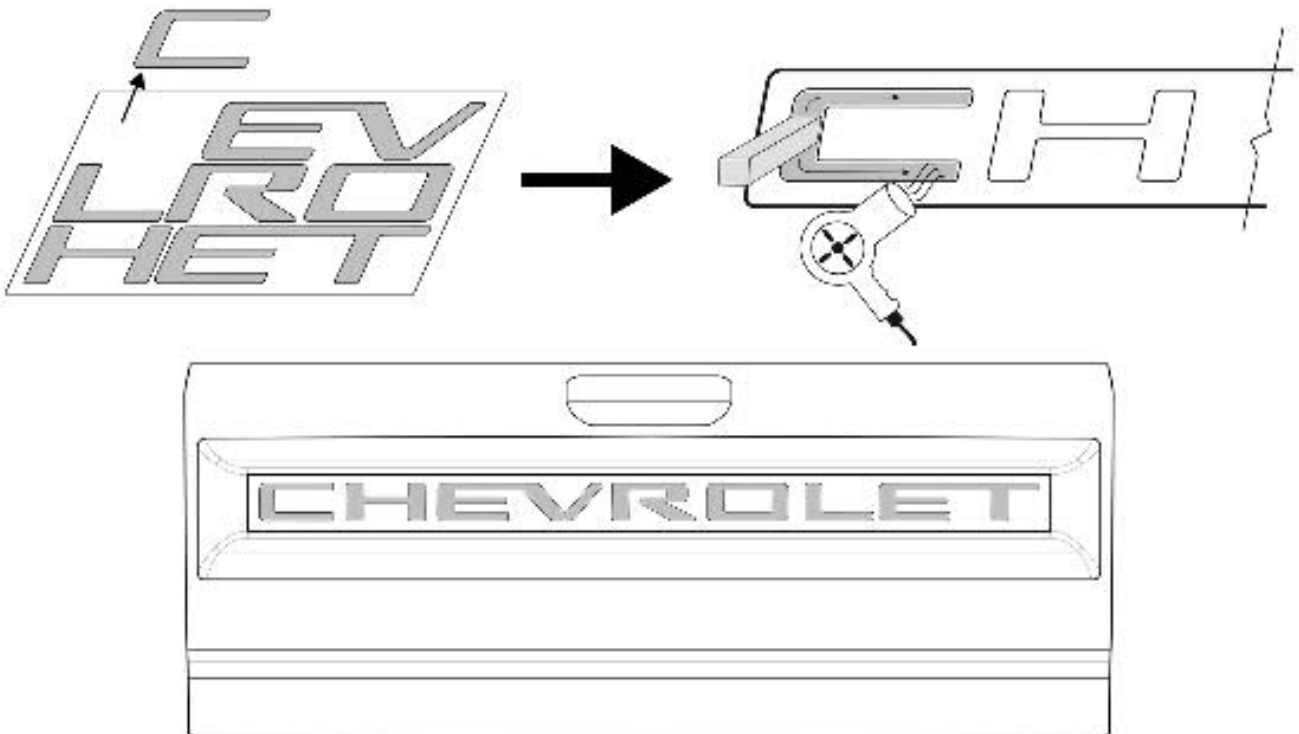

1. The body surface should be between 60°F and 90°F at the time of installation and for two hours after.
2. Thoroughly wash the rear tailgate surface with warm soap and water.
3. Clean the surface with solvent wipe and remove any residue with a clean lint-free cloth.
4. Carefully remove the "C" from the kisscut sheet.
5. Carefully align the letter into the recessed "C" in the tailgate panel.

Note: This letter should be on the flat section of the recess and not roll up the side. Reposition as necessary.

6. Use finger-pressure to secure the letter into place.
7. Use the felt block (supplied) to re-press the entire letter.
8. Apply heat from a hair dryer to the letter and re-press it into place with the felt block.
9. Repeat this same process for applying each of the individual letters into their respective recessed cavities.

Note: After a decal installation has been completed, do not high pressure wash the vehicle for 72 hours.