

Document ID: 5509169

Rear Decal Package Installation

Installation Instructions Part Number

84743990

Kit Contents

Qty	Description
1	Decal Sheet - Tailgate Letters
1	Felt Block (Application Tool)
2	Solvent Wipe
1	Installation Instructions

Tools Required

Lint-free cloth


Hair dryer or equivalent

Before you start

Note: For the decals to adhere best, the vehicle's mating surface (endgate) should be free of damage (dents, scratches, creases, fractures, etc.).

1. The body surface should be between 15°C (60°F) and 32°C (90°F) at the time of installation and for two hours after.
2. Wash the vehicle endgate surface with warm soap and water. Then, thoroughly dry with a soft clean cloth.
3. Clean the endgate surface with solvent wipe and remove any residue with a clean lint-free cloth.

Procedure

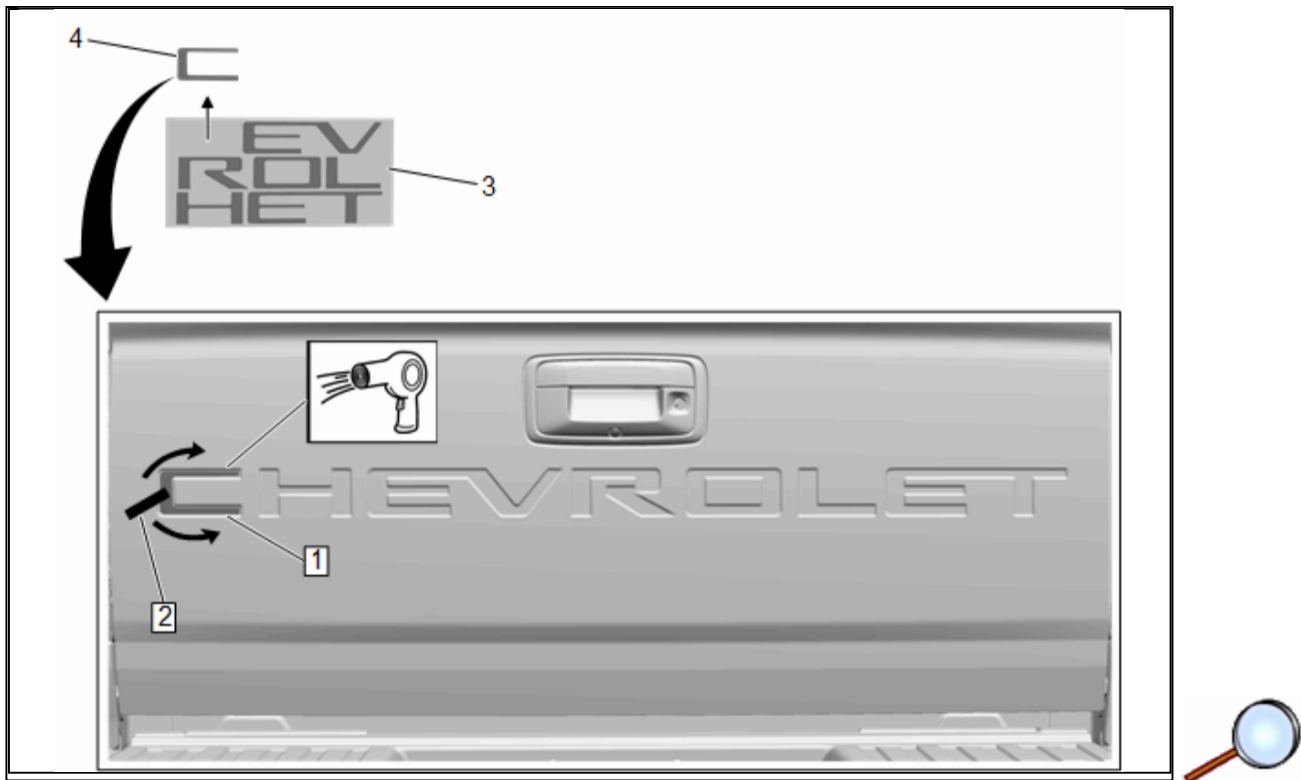

1. Carefully remove the "C" (4) from the decal sheet (3).

Note: This letter should be on the flat section of the recess and not roll up the side. Reposition as necessary.

2. Carefully align the letter into the recessed "C" (1) in the tailgate panel.
3. Use finger-pressure to secure the letter into place.
4. Use the supplied felt block (2) to re-press the entire letter (1).
5. Apply heat using a hair dryer or equivalent to the letter and re-press into place with supplied felt block (2).



6. Repeat steps 1 through 5 for applying each of the remaining letters into their respective recessed cavities of endgate.



- Note:** After installation of decals is complete, do not high pressure wash the vehicle for 72 hours.
7. Endgate decals complete.