

Body Emblem Package Installation (Instruction ID: 84973160)

Installation Instructions Part Number

84973160

Kit Contents

Qty	Description
1	Emblem Assembly Front Grille Illumination
1	Rear Push button/Monochromatic Emblem – Liftgate
7	Liftgate Applique Clips
4	Bolt - Front Emblem
1	Installation Instructions

Procedure


Front Grille Emblem Replacement

Note: Read all instructions before performing procedure.


1. Inspect kit to verify all parts are included.
2. Turn off the vehicle.
3. Open the hood.

Note: Make sure to remove and loosen the necessary front bumper fascia guide bolts as noted in front bumper fascia removal procedure.

4. Remove the front bumper fascia with grille. Refer to [Front Bumper Fascia Removal and Installation](#) in Vehicle Service Manual.

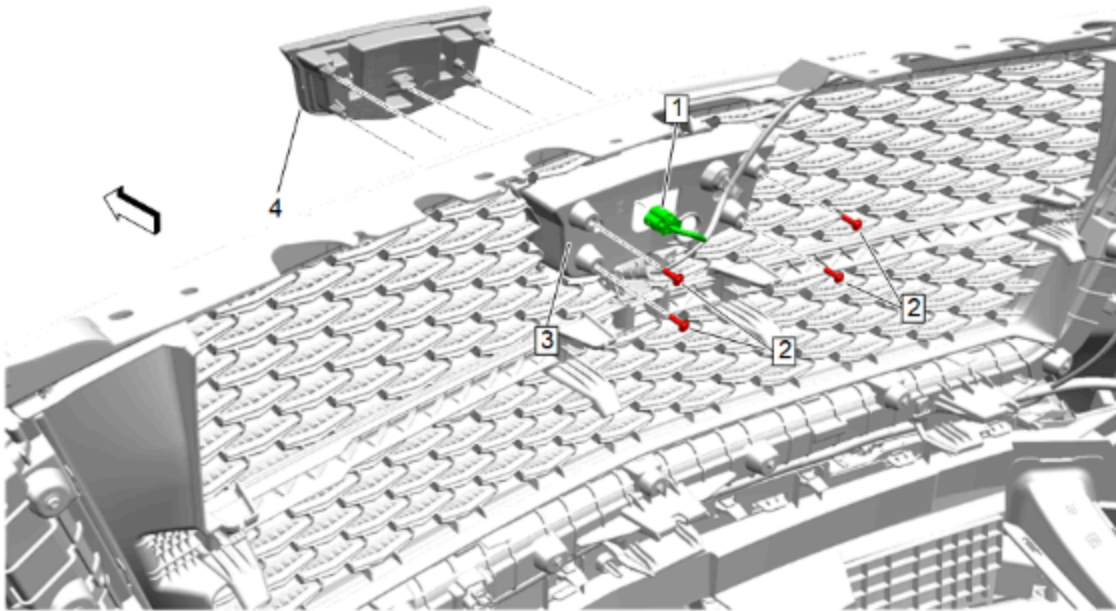

5. Disconnect electrical connector (1) from existing front grille emblem (4).
6. Remove and discard the bolts (2) and remove front grille emblem (4).

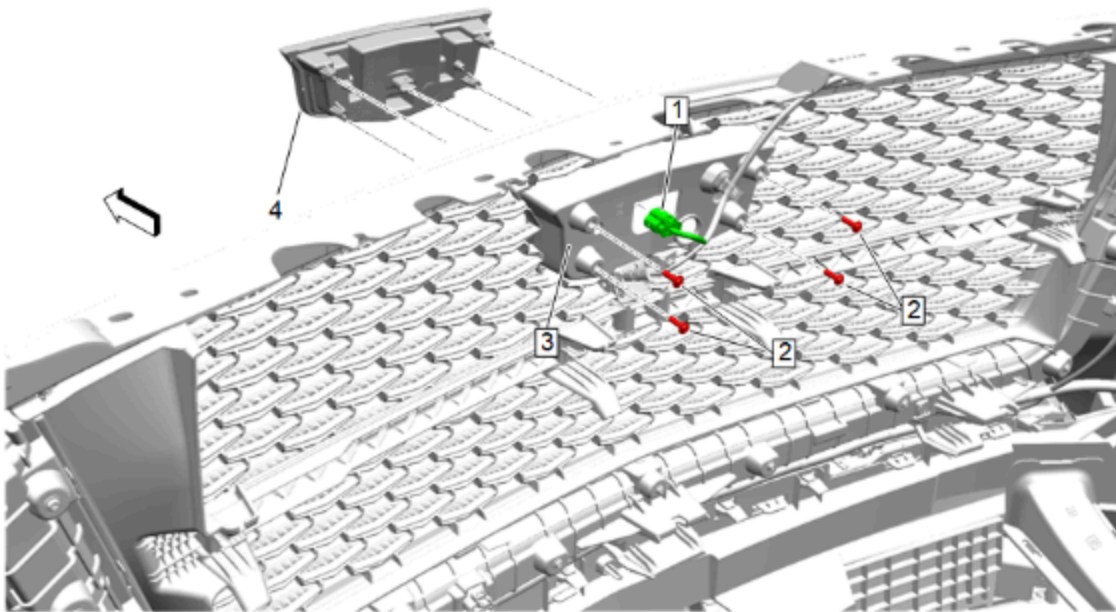

Caution: Use the correct fastener in the correct location. Replacement fasteners must be the correct part number for that application. Fasteners requiring replacement or fasteners requiring the use of thread locking compound or sealant are identified in the service procedure. Do not use paints, lubricants, or corrosion inhibitors on fasteners or fastener joint surfaces unless specified. These coatings affect fastener torque and joint clamping force and may damage the fastener. Use the correct tightening sequence and specifications when installing fasteners in order to avoid damage to parts and systems.


7. Install the new emblem (4) to grille and secure with the supplied bolts (2). Tighten the bolts to 2.5 N.m (22 lb in).
8. Verify that the emblem is fully seated and securely attached to the grille.
9. Connect electrical connector (1) to emblem (4).

Note: Prior to full installation of front bumper fascia, with the aid of an assistant, position the front bumper fascia to vehicle and make all electrical connections and test function of grille emblem. Once electrical functions are confirmed, continue with front bumper fascia installation.


10. Reinstall the front bumper fascia with grille. Refer to [Front Bumper Fascia Removal and Installation](#) in Vehicle Service Manual.

Rear Monochromatic Emblem Replacement


1. Turn off vehicle.
2. Open the liftgate.
3. Remove the rear closure center applique. Refer to [Rear Closure Center Applique Replacement](#) in Vehicle Service Manual.

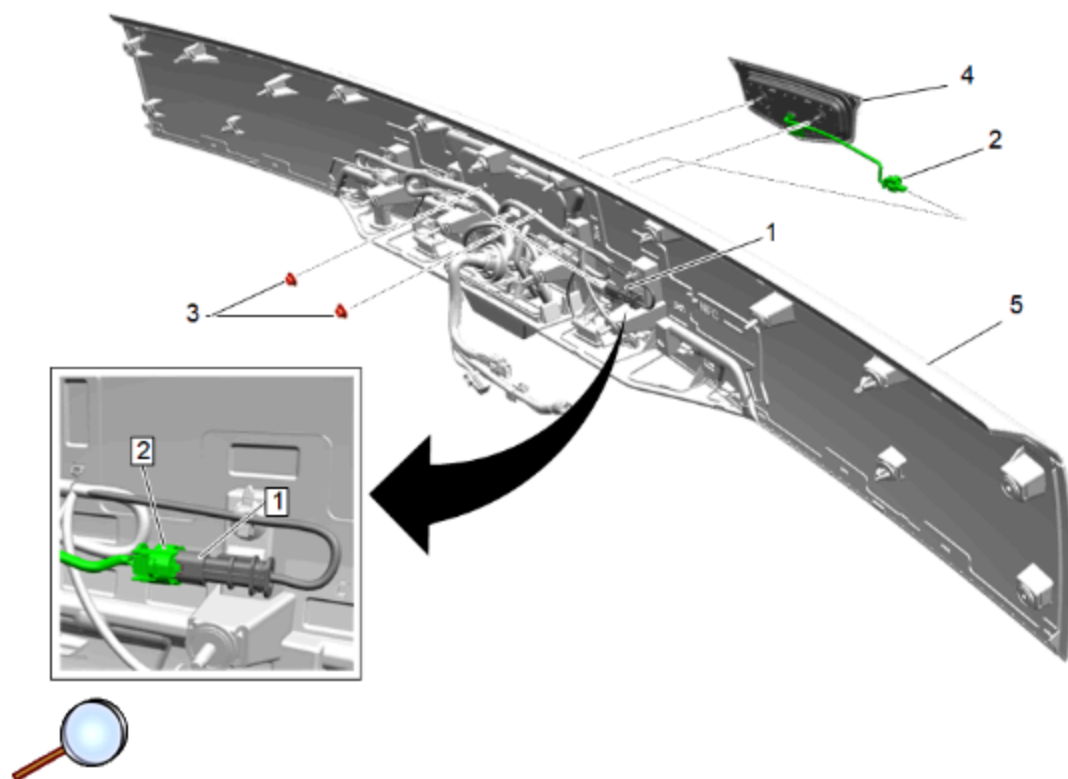

4. Disconnect emblem connector (2) from the rear closure center applique harness (1).
5. Remove and retain the nuts (3) from emblem and remove emblem (4) from rear closure center applique (5)

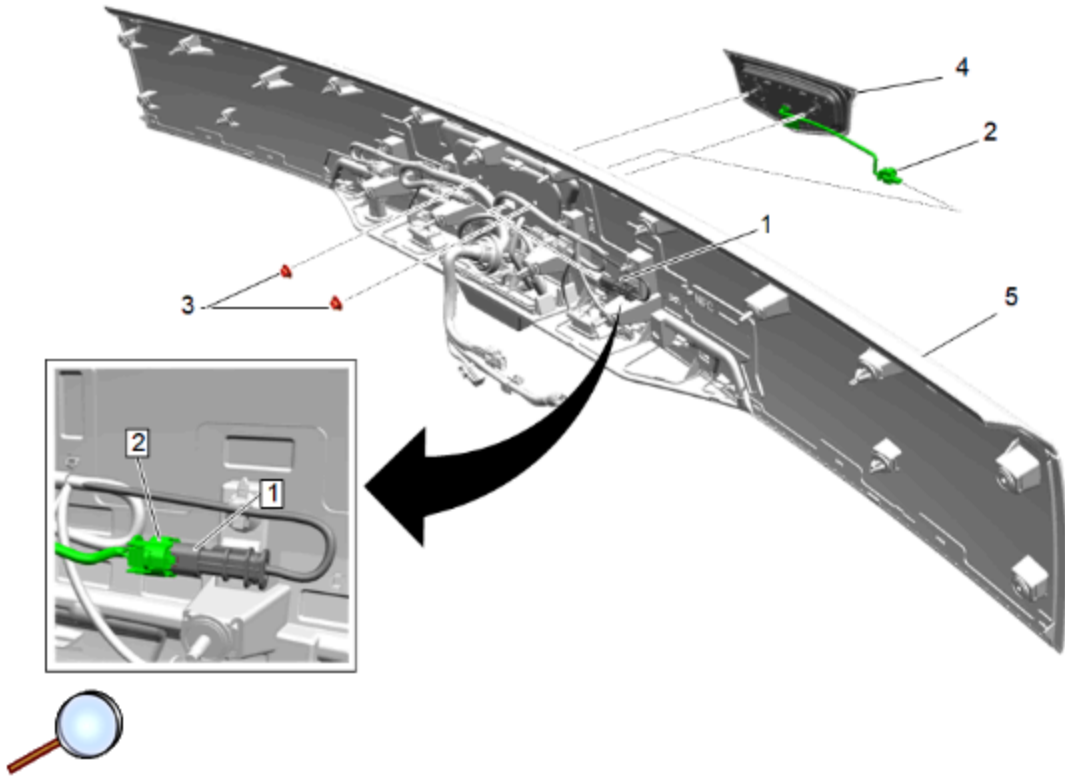

6. Position the harness (2) of new rear emblem through the hole in rear closure center applique (5), then install new rear emblem (4) and secure with the previously retained nuts (3). Tighten the nuts to 4.7 N.m (42 lb in).
7. Connect emblem connector (2) to the rear closure center applique harness (1).

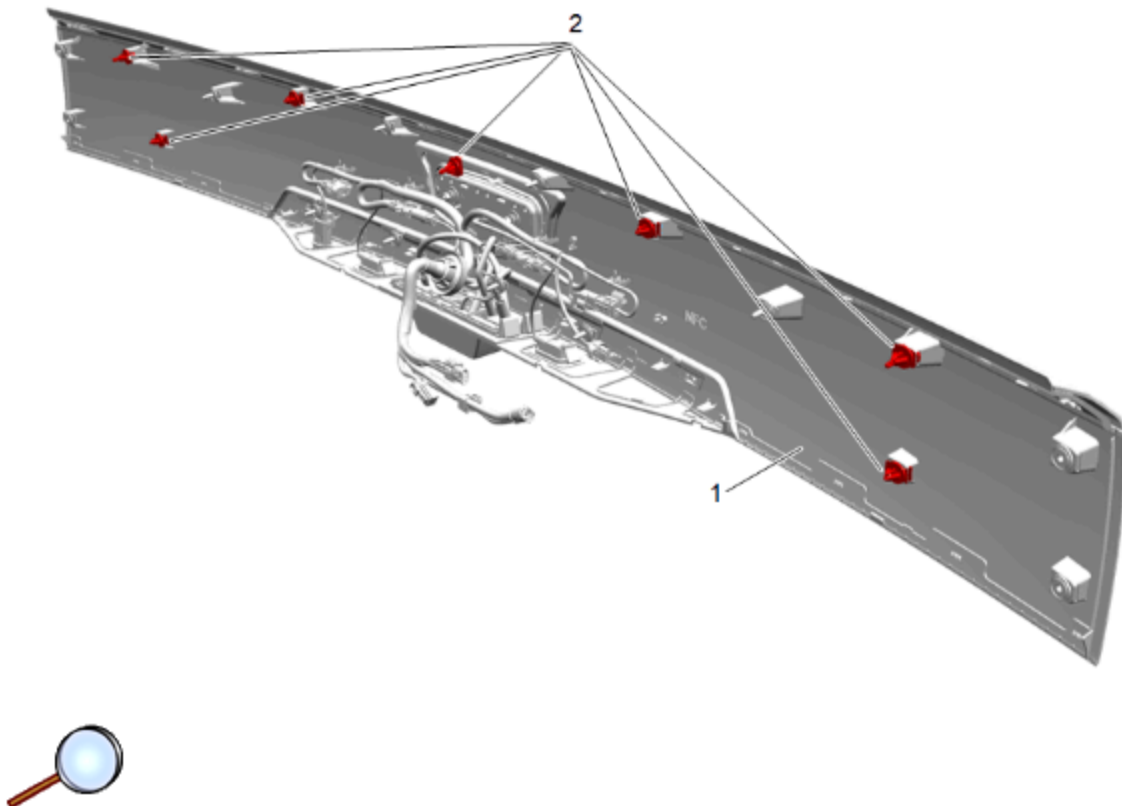

Note: If any clips (2) on rear closure center applique (1) are broken during removal, replace with supplied clips in kit.

Note: With the aid of an assistant while carefully supporting the rear applique, make all electrical connections and test function of rear emblem switch. Once electrical functions are confirmed, continue with the installation of the rear closure center applique.

8. Reposition the applique wiring and hoses and reinstall applique to liftgate. Refer to [Rear Closure Center Applique Replacement](#) in Vehicle Service Manual.
9. Close liftgate.